

Thin Film of Benzene Deposited on 304L Stainless Steel using Pulsed Microwave Plasma Enhanced Chemical Vapor Deposition

Elarbi Khalil *
Abdulmagid Bouzed**
Omran Musbah *
Sana Sbata *
Wong Chiow San ***
Chin Oi Hoong ***

Abstract:

Thin films have been deposited by plasma polymerization onto 304L stainless steel and glass substrates using pulsed microwave Plasma Enhanced Chemical Vapor Deposition (PECVD) with urebenzene (C_6H_6) as precursor gas. The chemical structure and surface properties (wettability) of the deposited thin films were characterized by Fourier Transform Infrared (FTIR) spectroscopy and the Water Contact Angle (WCA) measured using an optical tensiometer respectively. The effects of working pressure and deposition time on the chemical structure and surface wettability of the deposited thin films were studied. The results of the FTIR analysis showed that the structure of the film prepared from benzene changed in which the $C\equiv C$ absorption bands became more prominent on decreasing the working pressure.

The characteristic absorption peaks of benzene film were presented more prominently in the sample prepared with the longer deposition time. All the treated samples registered reduced WCA below 90° , their hydrophilic surfaces became more wettable. The deposition time had the greatest influence on the CA measured. It

was observed that wettability can be adjusted by the plasma parameters, enabling the production of coatings with properties suitable for specific practical applications.

Keywords:

* Materials & Metallurgy Engineering, Faculty of Engineering, University of Tripoli, Libya.

*** Plasma Technology Research Center, Department of Physics, Faculty of Science, University of Malaya, Malaysia

Introduction:

Plasma polymerization is gaining importance for the last several years as a tool to modify material surfaces [1]. It has been defined as the formation of polymeric materials under the influence of plasma [2]. It refers to the deposition of polymer thin film through plasma dissociation due to the excitation of an organic monomer gas and subsequent deposition and polymerization of the excited species on the surface of a substrate [3]. Plasma polymerization can be used to fabricate polymer thin films (100 Å to 1 μm) from a variety of organic and organometallic starting materials. Among many chemical vapor deposition (CVD) methods, plasma-enhanced chemical vapor deposition (PECVD) process is a very efficient method to produce homogeneous organic thin films on large area substrates and offers good control over the film properties

[4]. Polymeric thin films obtained by (PECVD) have several advantages over films produced by conventional polymerization

[5]. The main advantage of plasma polymerization is that it can occur at moderate temperature compared to conventional chemical reaction [3]. Additionally, plasma polymerized surfaces have an economical advantage of a green (environmentally benign) technology as compared to other processing methods [5]. In many cases, polymers formed by plasma polymerization have different chemical compositions as well as chemical and physical properties from those formed by conventional polymerization, even if the same monomers are used in plasma and conventional polymerization [6]. The resulting thin films that are highly coherent and adherent to a variety of substrates including conventional polymer, glass and metal surfaces may be prepared from monomers not polymerizable by conventional means. Plasma polymerized films which are pinhole free and highly crosslinked and therefore are insoluble, ca

n betailored to exhibit properties such as chemically inert, mechanically tough and thermally stable [4,5]. Due to these excellent properties they have been undertaken very actively in the last few years for a variety of applications such as protective coatings, biomedical materials, electronic and optical devices [4]. Plasma polymerized coatings are increasingly being investigated in biomedical applications.

These include surface modification of biomaterials to enhance implant integration and sterilization and to improve device multifunctionality, tribological and mechanical properties, as well as biocompatibility of artificial devices while obviating the needs for large expenses and long time to develop brand new materials [5, 6].

There are many sources used for plasma generation in P

CVD processes, the common sources are direct current (DC), radio frequency (RF) and microwave (MW) discharge [7]. Microwave discharges are widely used for generation of cold plasma at pressures from 105 Torr up to atmospheric pressure in the pulse and continuum wave regimes at incident powers ranged between several Watts and hundreds of kW for different applications [8]. Recently, pulsed power has been successfully employed in plasma polymerization of a variety of monomers. Greater retention of the monomer functional group is observed in the resulting polymeric film with pulsed plasma polymerization [9]. Magnetrons are the most common microwave generators because of their low cost and availability in the market for domestic use e.g. microwave ovens [10]. There are several classes of the microwave plasma generators including the waveguide microwave plasma generator [8] which was used in this study.

In this study pulsed microwave plasma system constructed for the deposition of polymer like organic thin films of benzene on 304L stainless steel substrates used in medical applications and glass substrates (for FTIR analysis). Benzene and Argon were used as precursor and carrier gases respectively. The effects of working pressure and the deposition time on the chemical structure a

(القسم الإنجليزي) ترسيب رقائق من البنزين على الصلب المقاوم للصدأ

and surface wettability of the deposited thin films were investigated.

Experimental Work:

Deposition system:

The deposition system used in this work is a home made PECVD designed system which is illustrated in figure (1). It is a multipurpose system for the treatment by plasma processes such as thin film deposition, surface cleaning, nitriding, and etc.

The system consists of deposition chamber, vacuum system and microwave generator (plasma source). The deposition chamber composed of a stainless steel cylindrical chamber 25 cm long and 14.5 cm in diameter provided with four ports: the first port for vacuum system, the second for gas inlet (gas supply), the third for waveguide and the last one with a glass window for observing the deposition process. The vacuum system consists of a turbomolecular pump backed by mechanical pump (Varian model) and pressure gauges (Ionic and Pirani Gauges). The microwave is generated by the microwave furnace (commercial magnetron) at frequency of 2.45 GHz with maximum power of 900 W which was transmitted to the chamber via a wave guide.

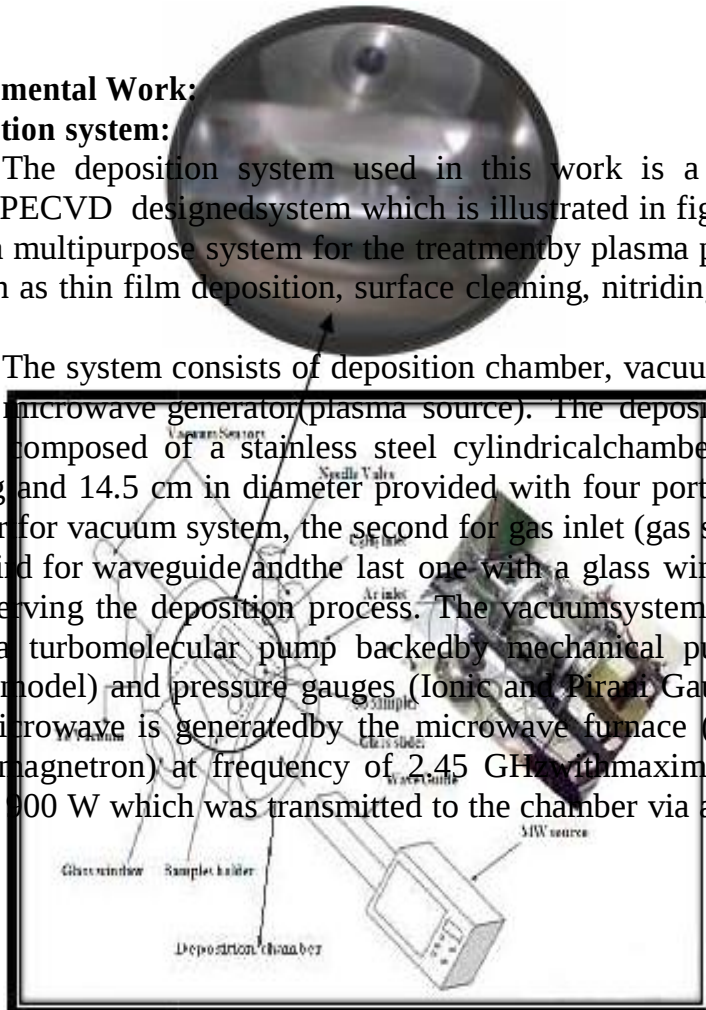


Fig (1) Schematic diagram of the homemade pulsed microwave plasma system

Sample preparation and deposition procedure:

Two types of materials were used in this experiment. The first type was discshaped 304L Stainless Steel (SS) samples of 16 mm diameter and 8 mm thick which were cut by Electric Discharge Machining (EDM). The second type was glass slide of dimension 85x25x1 mm suitable for FTIR analysis. The surfaces of the 304L SS samples were mechanically wet ground

(القسم الإنجليزي) ترسيب رقائق من البنزين على الصلب المقاوم للصدأ on SiC papers down to 2000 grit and then polished with alumina paste and rinsed with distilled water. Both types of samples (SS and glass) and the deposition chamber were precleaned by acetone before the deposition process.

The 304L SS is a biomedical grade austenitic type of stainless steel which is a common grade used in biomedical applications. This alloy contains mostly iron, about 17wt% chromium, 10wt% nickel and small amounts of other alloying species.

Before deposition, the microwave plasma of argon gas was applied to some samples at a power of 180 W for 15 min and working pressure of 3.7 mTorr (the pulsing time was 6 s), this process was carried out to remove any contaminations or organic oxides from the surface of samples and the chamber wall (i.e. precleaning process for both chamber and samples).

Thin film deposition processes were conducted at various parameters as indicated in table (1). Argon gas (Ar) used as a carrier. The mixture (Ar/C₆H₆) has a ratio of (30:70) respectively.

Table (1) Parameters of the deposition process

Parameter	Value
Power	540 W
Base pressure	0.088 – 0.13 mTorr
Working pressure	10, 30, and 50 mTorr
Deposition time	5, 15, and 30 min
Ar/C ₆ H ₆ ratio	30:70

The working power P was adjusted at 540 W, but the effective power for pulsed microwave discharge P_{eff} was:

$P_{eff} = \text{duty cycle} \times P$
Duty cycle = $\frac{t_{on}}{(t_{on} + t_{off})}$ where t_{on} and t_{off} are the time duration of plasma ON and OFF states respectively.

Duty cycle = $\frac{18}{(18+3)} = \frac{18}{21} = 0.857 \sim 86\%$

$P_{eff} = 540 \times 0.857 = 463 \text{ W}$


Characterization of thin films: Spectroscopic Characterization:

Fourier-Transform Infrared (FTIR) Spectroscopy:

The FTIR absorbance spectrum of the sample provides information about the unique chemical bonds and molecular structure of the material. In this work, the chemical structure of the thin films formed by pulsed plasma polymerization from benzene at different deposition parameters was analyzed via the FTIR spectroscope (model Thermo Scientific™ Nicolet™ iS™10 FT-IR).

The spectrum ($4000 - 400 \text{ cm}^{-1}$) can be approximately divided into four regions [11] as shown in figure (2) [12]. The OH and CH stretching region ($4000 - 2500 \text{ cm}^{-1}$), the triple bond $\text{C}\equiv\text{C}$ region ($2500 - 2000 \text{ cm}^{-1}$), the double-bond $\text{C}=\text{C}$ and $\text{C}=\text{O}$ region ($2000 - 1500 \text{ cm}^{-1}$) and the fingerprint region ($1500 - 600 \text{ cm}^{-1}$) [11].

The fingerprint region is different for each molecule. This is normally a complex area showing many bands, frequently overlapping each other. These overlapped regions make it difficult to make simple assignments [13], so the discussion will only focus on the other functional group regions ($4000 - 1500 \text{ cm}^{-1}$).

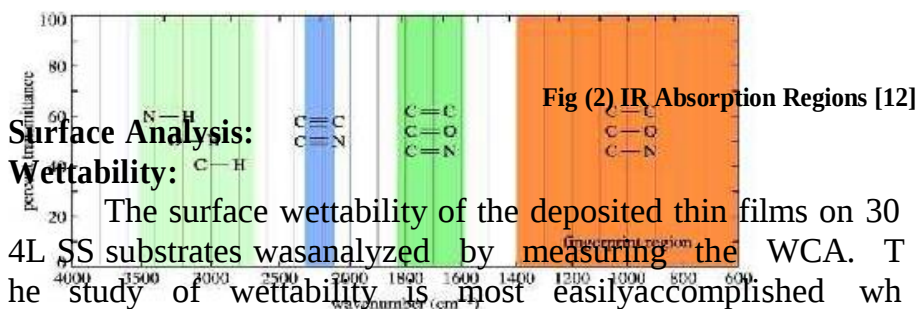

(القسم الإنجليزي) ترسيب رقائق من البنزين على الصلب المقاوم للصدأ

When the solid phase is perfectly flat, smooth, chemically homogeneous and completely clean. When the contact angle of the water drop is high ($>90^\circ$), the surface is referred to as hydrophobic surface which is exemplified by poor wetting, poor adhesiveness and low solid surface free energy. When the drop of water has low contact angle ($<90^\circ$), the surface is referred to as hydrophilic surface which is exemplified by good wetting, good adhesiveness and high solid surface free energy [14,15] as shown in figure (3).

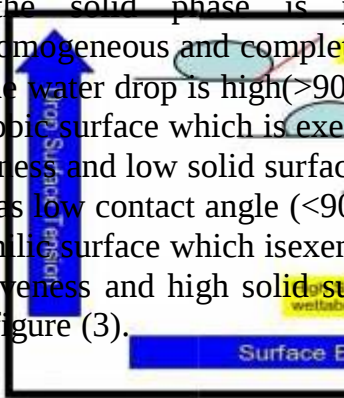


Fig (3) Contact angles formed by sessile liquid drops on a smooth surface [15]



Experimental Results and Interpretation:

During plasma deposition, the benzene decomposed into fragments and radicals [16] and thin film of amorphous hydrogenated carbon (aC:H) was formed with different chemical structures. The mechanism of benzene decomposition involved the splitting of the ring and formation of radical and secondary products such as polymers as well as hydrogen abstraction from the ring as illustrated in figure (4).

Bond	Wave number (cm ⁻¹)	Intensity	Functional group
O - H str	3400 - 3600	s	Primary alcohol
C - H str	2945 - 2939	m	Alkanes
C = C str	1683 - 1670	v	Alkenes
C ≡ C str	2100 - 2260	v	Alkynes
C - H str	1388 - 1385	m-w	Alkanes

FTIR Spectrum:

The structure of IR spectrum for benzene, C₆H₆, is shown in figure (5). Every carbon has a single bond to hydrogen. Each carbon is bonded to two other carbons and the carbon-carbon bonds are alike for all six carbons. The molecule is planar. The aromatic C-H stretch appears at 3100 3000 cm⁻¹. There are aromatic C=C stretch bands (for the carbon-carbon bonds in the aromatic ring) at about 1500 cm⁻¹. Two bands caused by bending motions involving carbon-hydrogen bonds appear at approximately 1000 cm⁻¹ for the inplane bend and at about 675 cm⁻¹ for the out-of-plane bend [17].

The spectrum of benzene was compared to the FTIR spectra of the deposited thin film shown in figures (6) and (7). The bands in the aromatic ring did not appear in the spectra of the deposited thin film. The bands related to the stretching modes of CH were observed at ranges of 2939 2945 cm⁻¹ and 1385 1457 cm⁻¹. The bands at 1670 1683 cm⁻¹ are related to the C=C bond. Some spectra show bands at 2177 2186 which are related to the C≡C bond. Table (2) illustrates the absorption bands detected in the spectra of the deposited thin film after comparing the peak numbers with the spectroscopic data in references [18] and [19].

Table (2) Identification of bond frequency, absorption and functional groups of the thin films deposited on glass slides

(القسم الإنجليزي) ترسيب رقائق من البنزين على الصلب المقاوم للصدأ

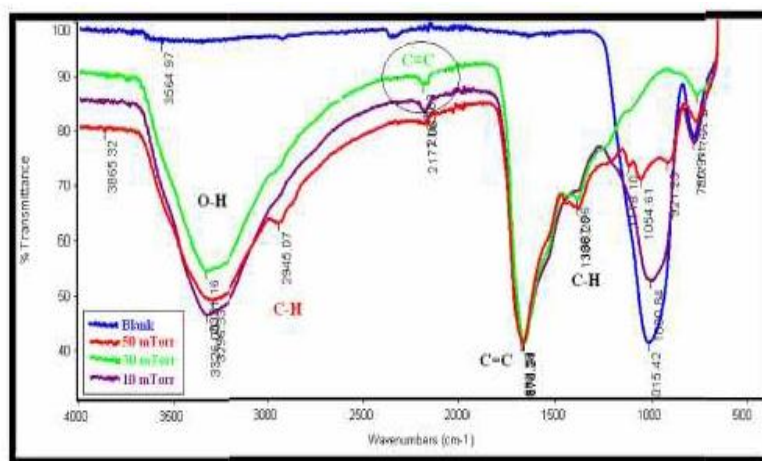


Fig (5) IR spectrum of benzene

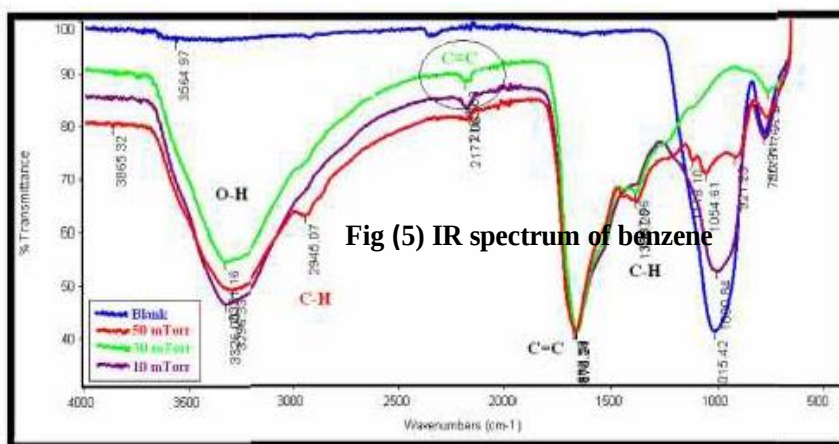


Fig (6) IR spectra of thin films deposited from benzene at 50, 30 and 10 mTorr for 30 min

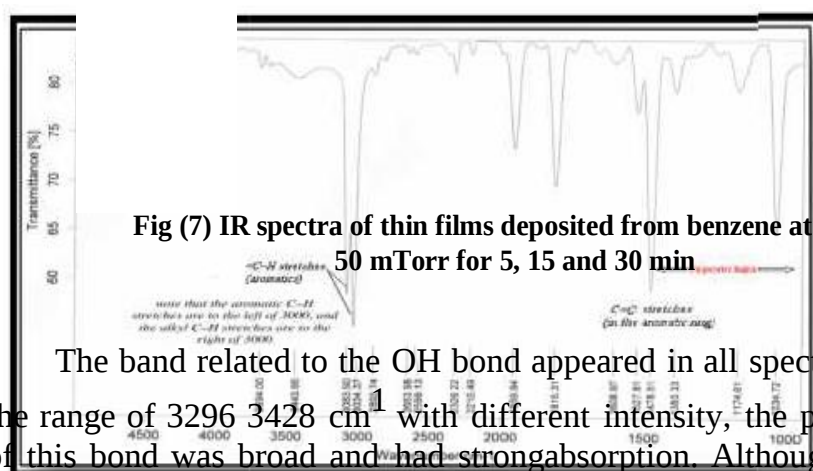


Fig (7) IR spectra of thin films deposited from benzene at 50 mTorr for 5, 15 and 30 min

The band related to the OH bond appeared in all spectra in the range of 3296-3428 cm^{-1} with different intensity, the peak of this bond was broad and had strong absorption. Although, there was no oxygen compound used with benzene during the deposition process, the peaks of OH bond appeared due to the remaining moisture inside the deposition chamber. This was confirmed after using precleaning with Argon plasma before deposition and using argon as a carrier gas with benzene by Ar:C₆H₆ ratio of 30:70 respectively as shown in figure (8). The figure shows the IR spectra of thin films deposited at 30 mT

(القسم الإنجليزي) ترسيب رقائق من البنزين على الصلب المقاوم للصدأ

orr working pressure for 5min from purebenzene with and wit
hout precleaning and from mixture of Ar and C6H6 by ratio of
30:70.

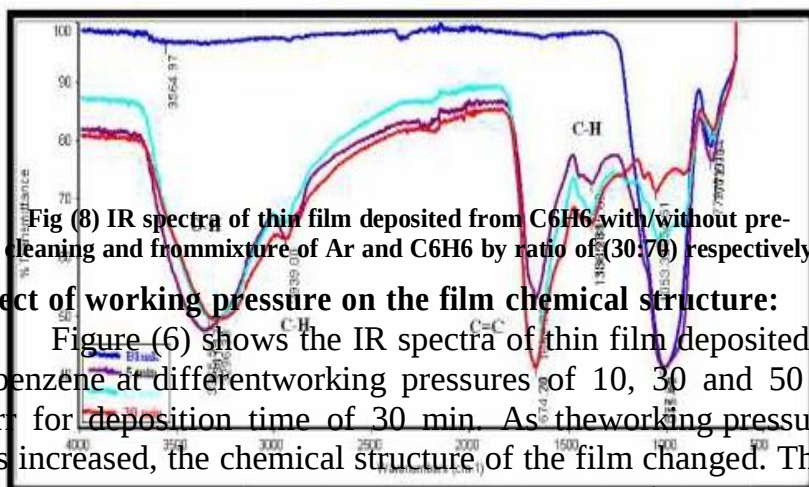


Fig (8) IR spectra of thin film deposited from C6H6 with/without pre-
cleaning and frommixture of Ar and C6H6 by ratio of (30:70) respectively

Effect of working pressure on the film chemical structure:

Figure (6) shows the IR spectra of thin film deposited from
m benzene at differentworking pressures of 10, 30 and 50 m
Torr for deposition time of 30 min. As theworking pressure
was increased, the chemical structure of the film changed. The b

andof $C\equiv C$ was seen at 2177 and 2186 cm^{-1} for depositi
on at 10 and 30mTorrrespectively. By further increase in w
orking pressure to 50mTorr the band of $C\equiv C$ disappeared and t
he band of CH was deected at 2945 cm^{-1} . The working press
ureaffected the chemical structure of the film deposited due t
o the amount of benzeneintroduced into the deposition chambe
r; as was clearly observed in figure (9).

Effect of deposition time on the film chemical structure:

Figure (7) shows the IR spectra of the benzene fil
msdeposited on glasssubstrates prepared with different deposit
ion times of 5, 15 and 30 min at 50 mTorrThere are slight ch

the absorption intensity (% transmittance) of C=C vibration bands. The absorption intensity increased (i.e. transmittance decreased) by increasing the deposition time as shown in Figures (7) and (10) and the films formed become thicker though the film formed exhibited the same chemical structures (same functional groups). The FTIR analysis indicated that the deposition process in this work was more effective at a given deposition time.

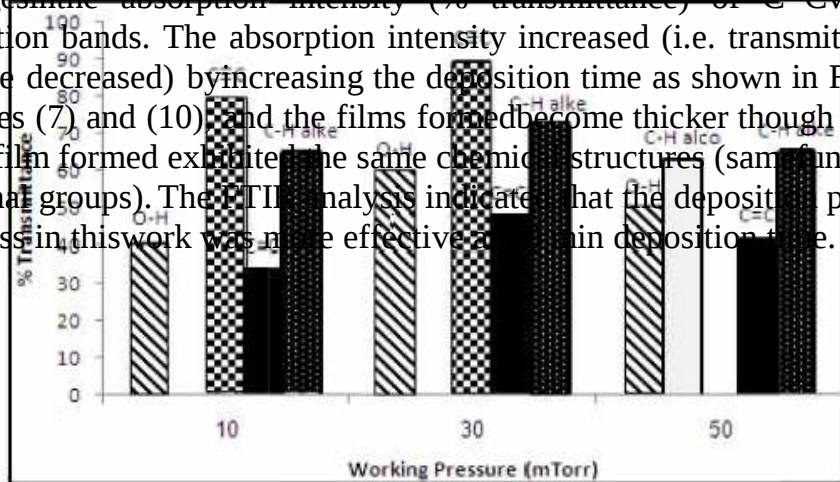


Fig (9) Effect of working pressure on the absorption intensity (% Transmittance) of the bonds in the FTIR spectra of the thin films deposited from benzene for 30 min.

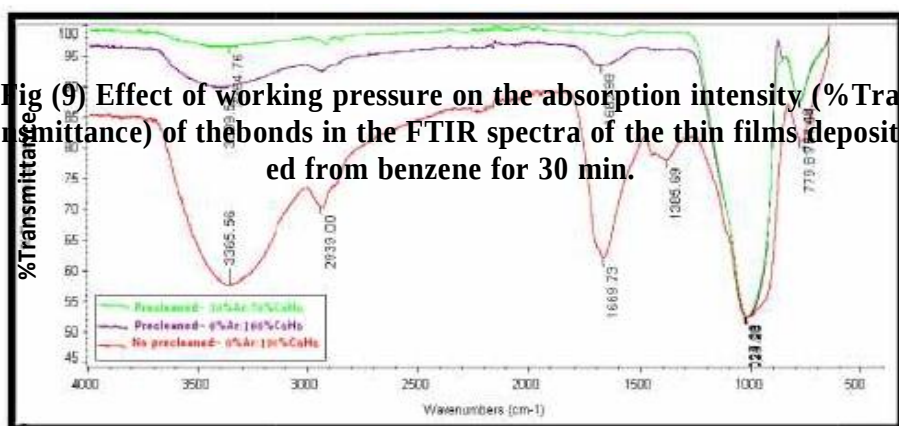



Fig (10) Effect of deposition time on the absorption intensity (%Transmittance) of the bonds in the FTIR spectra of the thin films deposited from benzene at 50 mTorr.

Wettability:

The surface wettability of the deposited thin films on the 304L SS substrates was analyzed by measuring the water contact angle on the thin films deposited from benzene at different deposition parameters as shown in figure (11). As can be seen in table (3), the contact angle (θ) is lower than 90° for all the samples and hence, are classified as hydrophilic surfaces (wetable).

Table (3) The results of measured contact angle and surface free energy

Fig (11) Optical images of the water contact angle measurement of the thin films deposited from benzene at different deposition parameters

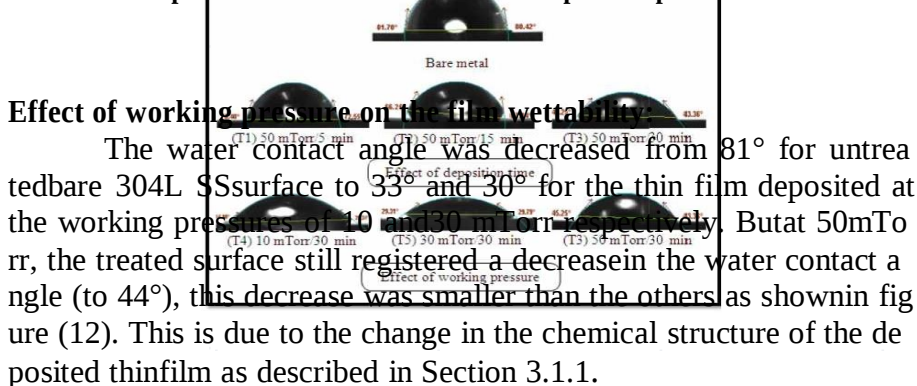

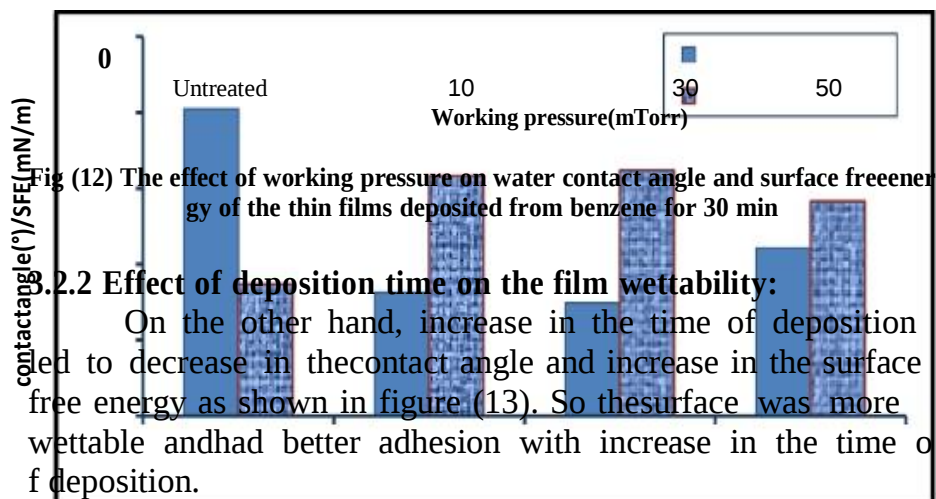
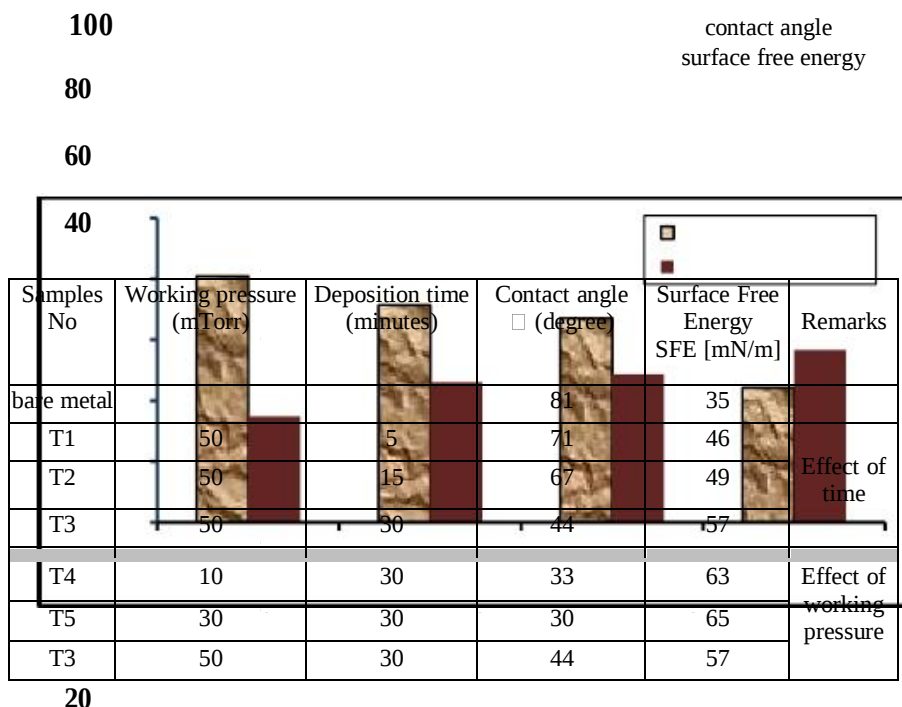


Fig (12) The effect of working pressure on water contact angle and surface free energy of the thin films deposited from benzene for 30 min

3.2.2 Effect of deposition time on the film wettability:

On the other hand, increase in the time of deposition led to decrease in the contact angle and increase in the surface free energy as shown in figure (13). So the surface was more wettable and had better adhesion with increase in the time of deposition.

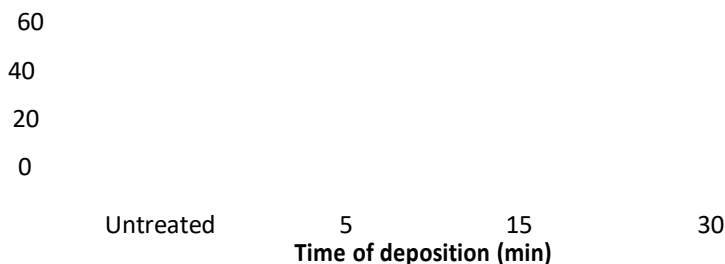


Fig (13) The effect of deposition time on water contact angle and surface free energy of the thin films deposited from benzene at 50 mTorr

Conclusion:

Plasma polymerized thin films have been deposited on 30 L Stainless Steel and glass substrates at room temperature using benzene as precursor gas by PECVD method. Pulsed microwave with frequency of 2.45 GHz and 540 W was applied for the ignition of the plasma. FTIR analysis indicated the decomposition of the benzene ring and formation of a C:H films in aliphatic group. According to the effect of deposition parameters, the chemical structure of the thin films was affected by working pressure. The time of deposition was the most influential factor on the film surface wettability. So the deposition process is more effective at 30 minutes and 50 mTorr. All the samples had contact angle (θ) lower than 90° so they classified as hydrophilic (wetable surface).

Acknowledgements:

The authors thank to Plasma Research Laboratory, Authority of Natural Science Research and Technology for financial support and especially thanks to Materials and Metallurgy Engineering, Faculty of Engineering, University of Tripoli and Plasma Technology Research Center, Department of Physics, Faculty of Science, University of Malaya, Malaysia for help in providing experimental facilities.

4. H. M. Abourayana, N. A. Zreiba, A. M. Elamin, "Synthesis and Characterization of PlasmaPolymerized Thin Films Deposited from Benzene and Hexamethyldisiloxane using (PECVD)Method", International Journal of Chemical, Molecular, Nuclear, Materials and MetallurgicalEngineering Vol:5, No:2, (2011).
5. H. M. Abourayana and Denis P. Dowling; Plasma Processing for Tailoring the Surface Properties of Polymers"; Surface energy (2015) 123-152, DOI: 10.5772/60927.
6. P.K. Chu, J.Y. Chen, L.P. Wang, N. Huang, "Plasma surface modification of biomaterials", Materials Science and Engineering R 36 (2002) 143–206.
7. C. S. Wong, R. Mongkolnavin; "Elements of Plasma Technology", Springer Briefs in Applied Sciences and Technology, pp 15-48 (2016).
8. Y.A. Lebedev; "Microwave discharges: generation and diagnostics"; 25th Summer School and International Symposium on the Physics of Ionized Gases; Journal of Physics: Conference Series 257 (2010) 012016.
9. A. E. Lefohn, N. M. Mackie, and E. R. Fisher; "Comparison of Films Deposited from Pulsed and Continuous Wave Acetonitrile and Acrylonitrile Plasmas"; Plasmas and Polymers, Vol. 3, No.4, (1998).
10. C. A. Destefani, E. Siores, and A. B. Murphy; "Generation of Microwave-Induced Plasmas in Automotive Exhaust Gas Mixtures Using Pulsed Microwave Energy"; Journal of Microwave Power & Electromagnetic Energy, Vol. 38, No. 2, (2003) 95-101.
11. B. Stuart; "Infrared Spectroscopy: Fundamentals and Applications"; John Wiley & Sons, Ltd ISBNs: 0-470-85427-8 (HB); 0-470-85428-6 (PB) (2004)
12. Wade, Jr., L.G.; "Organic Chemistry", 5th ed. Pearson Education Inc., (2003).
13. Wade, Jr., L.G.; "Organic Chemistry", 6th ed. Pearson Prentice Hall Inc., (2006).
14. Carl Clegg; "Contact Angle Made Easy, 1st edition, 2013.

15. AST Products, Inc, "Principles of Video Contact Angle Analysis", 2006.
16. J. Friedrich; "Plasma Polymerization Mechanism"; Klingenthal Mühleithen, Germany, (2011).
17. W. Volland; "Organic Compound Identification Using Infrared Spectroscopy"; BellevueCommunity College, Washington, (1999).
18. B.D. Mistry, A Handbook of Spectroscopic Data ,CHEMISTRY", (UV, IR, PMR, CNMR and Mass Spectroscopy), India, (2009).
19. "Infrared Spectroscopy Absorption Table"https://chem.libretexts.org/Reference/Reference_Tables/Spectroscopic_Parameters/Infrared_Spectroscopy_Absorption_Table